




GLOBAL TRADING CO.

Efficiency Meets Innovation

Proudly Canadian 

Product Catalog



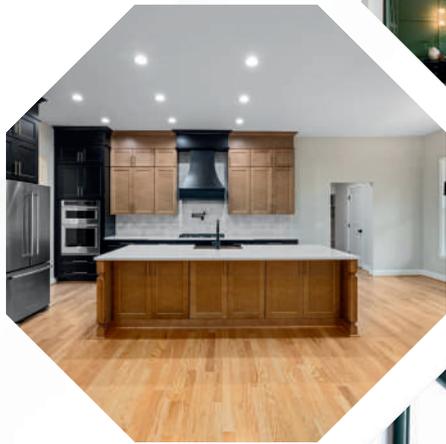

GLOBAL TRADING CO.

At Zippy Global Trading, we specialize in delivering smart, reliable, and energy-efficient solutions for homes, businesses, and industrial applications across Canada.


From advanced lighting to efficient golf carts, EV scooters and HVAC systems—our products are designed to perform and built to last.



LED Lighting

Elevate Your Environment

Elevate your environment with our cutting-edge LED lighting solutions. From sleek recessed downlights to high-performance high bays and modern pendant chandeliers, Zippy Global Trading offers energy-efficient, stylish, and long-lasting lighting for every space. Whether you're illuminating a home, office, warehouse, or retail location, our tunable color temperatures, dimming options, and smart designs bring brilliance and ambiance where it matters most.

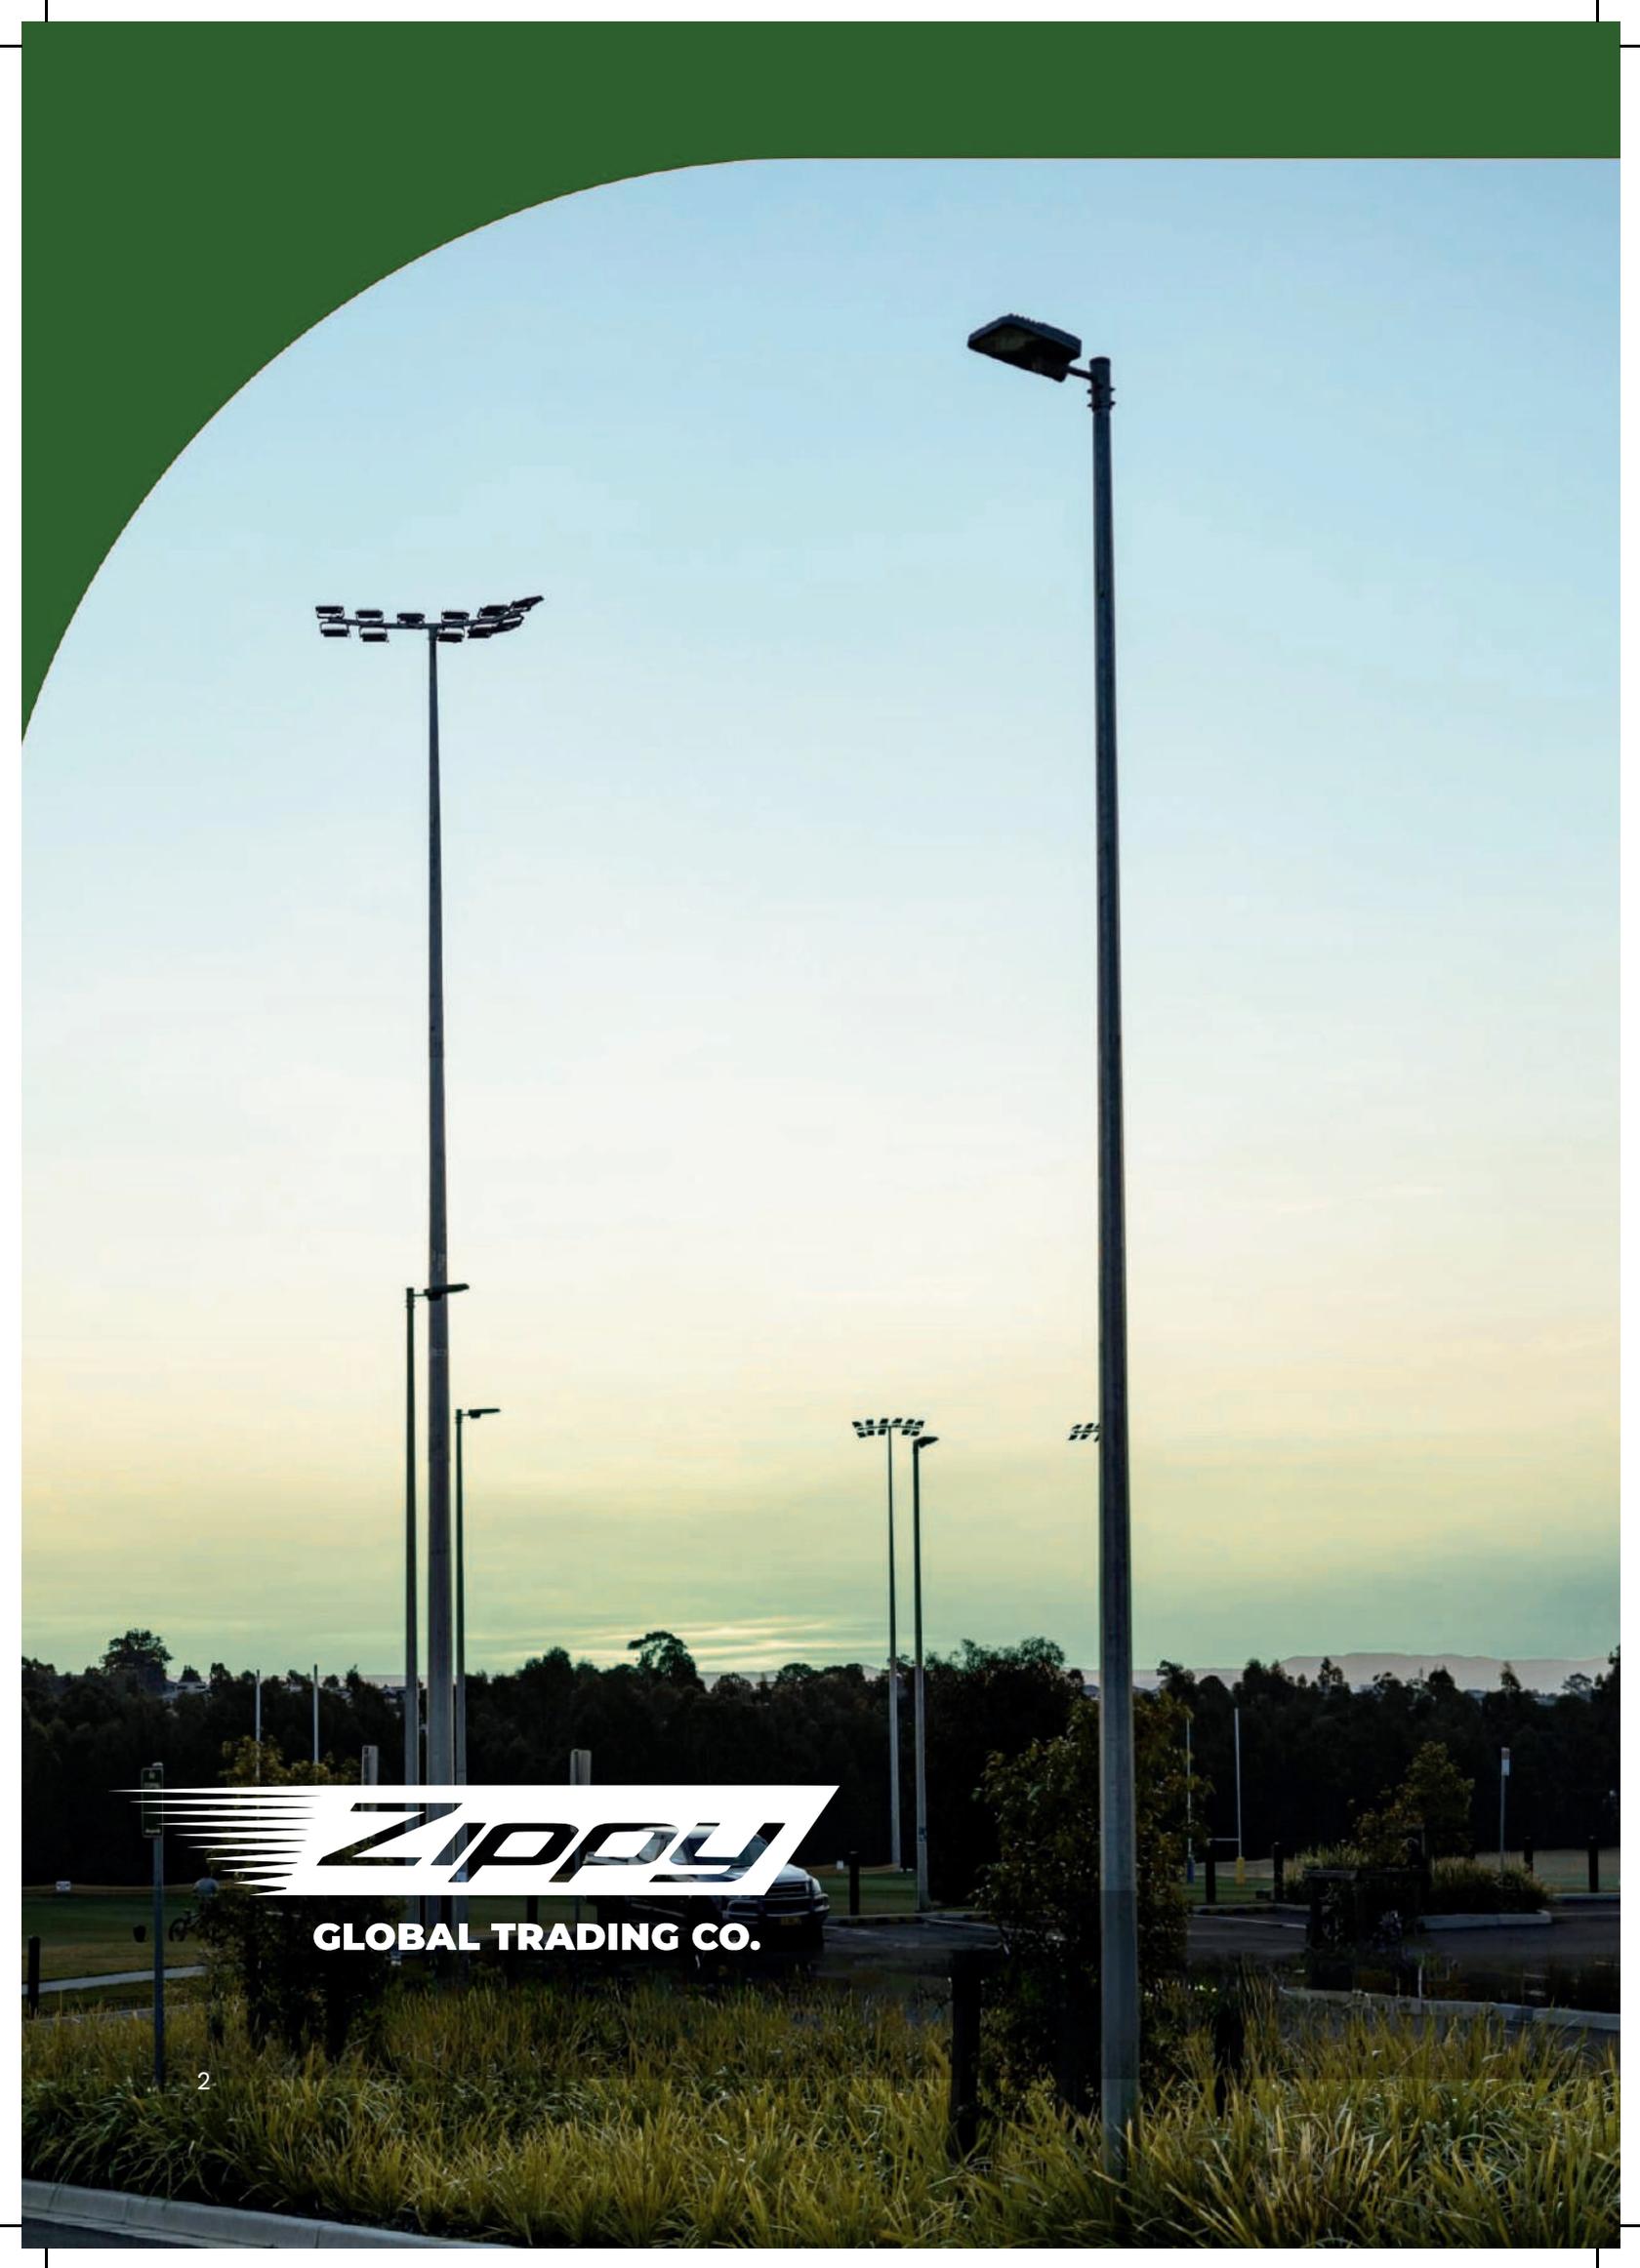

ZIPPY

GLOBAL TRADING CO.

LED Pendant Chandelier Light – Swirl Shape for Sophisticated Residential & Commercial Lighting



Elegant and modern, this swirl-shaped pendant light features a chrome finish, CCT-selectable lighting (3000K–5000K), Triac dimming, and a flexible diffuser. With 30W of power and 2600 lumens output, it's ideal for kitchens, dining areas, and staircases.

Includes 5-foot adjustable cables, is damp-rated, and backed by a 5-year warranty.



Check the Product on our website

Model	HY-PD2219-30W-3CCT-CR
Wattage	30W
Dimming	Triac Dimming
Lumen Output	2,600 LM
Input Voltage	120Vac 60Hz
CCT	3000K-4000K-5000K Selectable
CRI	Ra>80
Working Temperature	-32 F° ~ +113°F / -0°C ~ +45°C
Finish	Chrome
Life Span	Lumen Maintenance over 70% @ 50,000+Hours
Materials	Casing
Pendant Cable Length	Max at 5FT
PCS/BOX	1
Master Box Dimension	515x515x225mm / 20.27" x 20.27" x 8.85"
Master Box Weight	4.78LB

LED Pendant Chandelier Light – Linear Wave for Modern Dining and Living Spaces

With its sleek chrome finish and flowing design, this fixture adds a modern touch to dining rooms, living areas, and stairwells. It features CCT-selectable lighting (3000K–5000K), Triac dimming (10%–100%), and a frosted diffuser for smooth illumination. Powered by a 35W LED engine, it's damp-rated, energy-efficient, and built to last with a 50,000-hour lifespan and a 5-year warranty.



Check the Product on our website



Model	HY-PD4006-35W-3CCT-CR
Wattage	35W
Dimming	Triac Dimming
Lumen Output	2,975LM
Input Voltage	120Vac 60Hz
CCT	3000K-4000K-5000K Selectable
CRI	Ra>80
Working Temperature	-32 F° ~ +113°F / -0°C ~ +45°C
Finish	Chrome
Life Span	Lumen Maintenance over 70% @ 50,000+Hours
Pendant Cable Length	Max at 5FT
PCS/BOX	1
Master Box Dimension	1030x150x150MM / 40.55" x 5.90" x 5.90"
Master Box Weight	4.50LB



LED Ultra Slim Downlight - Stylish lightning for indoors & outdoors

Experience modern lighting with high efficiency and elegant design. Includes 5 color selectable, dimmable, and built to last over 50,000 hours.

It features 600 Lumens of brightness and dimming of 10%–100%. Powered by a 9W LED engine, it's the best energy-efficient and built to last with option with a 5-year warranty.



Check the Product on our website

Model	HY-USDL-R4-9W-5CCT
Wattage	9W
Lumen Output	600 LM
Input Voltage	AC 120V
CCT	2700K-3000K-4000K-5000K-6500K Selectable
Dimming Mode	10% - 100% Dimmable
Working Temperature	-13 F° ~ +113°F / -25°C ~ +45°C
Life Span	Lumen Maintenance over 70% @ 50,000+Hours
Dimension	120x11.5 MM / 4.72" x 0.45"

LED Recessed Downlight Series – Baffle, Fireproof & Stylish Lighting for Any Ceiling

Designed for versatility and style, this series includes ultra-slim, baffle, square, and fire-rated models. With selectable color temperature (2700K–6500K), Triac dimming, and durable construction, these downlights offer easy installation, energy efficiency, and a clean modern look. Ideal for residential, commercial, and hospitality ceilings, with a 50,000-hour lifespan and up to 5-year warranty.



Check the Product
on our website



Product Specifications	
Input Voltage	AC120V
CRI	>80
Power Factor	>0.8
Beam Angle	30°
THD	<20%
Dimming	Type IC
Lifespan	Lumen Maintenance over 70% @ 50,000+Hours
Operating Temperature	-13°F~+113°F/-25°C~+45°C
Application	Commercial / Residential / Hospitality

LED Disk & Surface Mount Ceiling Light Series – Compact, Efficient, and Smart Lighting



Compact and versatile, this series includes disk lights, motion-sensor models, and waterproof surface mounts. Featuring selectable color temperatures (2700K–5000K), Triac dimming, and high-transmittance diffusers, these low-profile fixtures offer easy installation and reliable performance. Ideal for bedrooms, corridors, offices, and commercial ceilings—backed by a 5-year warranty and up to 50,000-hour lifespan.



Check the Product on our website

Product Specifications	
Input Voltage	AC120V
CRI	>90
Power Factor	>0.8
Beam Angle	120°
THD	<20%
Dimming	Triac Dimming
Lifespan	Lumen Maintenance over 70% @ 50,000+Hours
Operating Temperature	-13°F~+113°F/-25°C~+45°C
Application	Drawing room / Bedroom/ Corridor /Administration office

LED Ceiling Light Series – Stylish, Efficient, and Versatile Indoor Lighting

Stylish and efficient, this ceiling light series is ideal for bedrooms, offices, and living spaces. With selectable color temperatures (3000K–5000K), Triac dimming, and a frosted diffuser, it delivers smooth, ambient lighting. Designed for easy installation with a slim profile and durable finish, these fixtures offer long-lasting performance with up to 50,000 hours of lifespan and a 5-year warranty.



Check the Product
on our website



Product Specifications	
Input Voltage	AC120V
CRI	>80
Power Factor	>0.8
Beam Angle	120°
THD	<20%
Dimming	Triac Dimming
Lifespan	Lumen Maintenance over 70% @ 50,000+Hours
Operating Temperature	-13°F~+113°F/-25°C~+45°C
Application	Drawing room / Bedroom/ Corridor /Administration office

LED Tube Series – High Efficiency Commercial Lighting



Engineered for high ceilings and demanding environments, this series delivers up to 54,000 lumens of bright, uniform light. Designed with efficient thermal fins, wide voltage input (AC120–347V), and options for motion sensors and reflectors, it supports 0–10V dimming and easy mounting. Ideal for warehouses, factories, and large commercial areas—durable, energy-efficient, and built to last.



Check the Product on our website

Product Specifications	
Input Voltage	AC120V-277V
CRI	>80
Power Factor	>0.9
Beam Angle	180°
THD	<20%
Dimming	Triac Dimming
Lifespan	Lumen Maintenance over 70% @ 50,000+Hours
Operating Temperature	-13°F~+113°F/-25°C~+45°C
Application	Supermarket/ Office/ Shopping Mall /Hotel /Hospital / School / Showrooms

LED UFO High Bay Series – High-Lumen Industrial Lighting for Warehouses and Commercial Spaces

Designed for high-ceiling industrial and commercial spaces, this series delivers powerful illumination with up to 54,000 lumens. Featuring efficient heat dissipation, 0-10V dimming, motion sensor options, and a wide input voltage range (AC120-347V), it ensures long-lasting performance. Ideal for warehouses, factories, supermarkets, and exhibition halls—durable, easy to install, and built to perform in demanding environments.



Check the Product on our website



Product Specifications	
Input Voltage	AC120V-277V/AC120-347V
CRI	>80
Power Factor	>0.9
Beam Angle	110°
THD	<20%
Dimming	0-10V Dimmable
Lifespan	Lumen Maintenance over 70% @ 50,000+Hours
Operating Temperature	4°F~+104°F/-20°C~+40°C
Application	Warehouse / Factory / Exhibition Room / Gas Station / Supermarket

LED Outdoor Light Series – High-Performance Lighting for Parking, Pathways, and Perimeters



Built for durability and performance, this series includes wall packs, mini packs, and shoebox lights—ideal for parking lots, building exteriors, and pathways. Featuring wattage and CCT adjustability, IP65-rated housings, and multiple mounting options, they offer up to 66,000 lumens of output. With optional motion sensors, surge protection, and long lifespans, these fixtures deliver reliable lighting for any outdoor project.



Check the Product on our website

Product Specifications	
Input Voltage	AC120V-277V / 120-347V / 277V-480V
CRI	>80
Power Factor	>0.9
Distribution Type	Type3
THD	<20%
Dimming	0-10V Dimmable
Protection Rating	IP65
Lifespan	Lumen Maintenance over 70% @ 50,000+Hours
Operating Temperature	4°F~+104°F/-20°C~+40°C
Application	Outdoor area / Parking lots / Buildings / Storage yards/ Parks and much more

LED Exit Sign with Battery – Compact, Durable Emergency Signage

Compact, durable, and essential for safety, this LED exit sign features switchable red or green lettering, integrated battery backup, and dual voltage input. Designed for commercial and industrial spaces, it offers reliable illumination during power outages. With a flame-retardant thermoplastic body, remote head capability, and UL924 certification, it's easy to install and built for long-term performance



Check the Product on our website



Product Specifications	
Voltage	120 / 277V 60Hz
Finish	White Finish / Red Sign
Emergency Time	90 Minutes
Battery	1.2V Ni-Cad Battery
Wattage	1.0W@ 120V; 0.85W @ 277V
Operating Temperature	32°F + 104°F / 0°C + 40°C
Package info	14.6 x12.4 x 8.3
PC / Master Pack	6 PCS
Weight	13.9 LB
Features	Injection molded, color stable, high impact UL 94-5VA rated polycarbonate Snap-fit construction to enable fast installation

LED Remote Capable Exit Sign Combo – Red/Green With Battery Backup



Designed for maximum safety and flexibility, this combo unit features switchable red or green EXIT lettering, integrated LED lamp heads, and remote head capability. It includes battery backup, dual voltage input, and a flame-retardant thermoplastic housing. UL924 certified and suitable for damp locations, it ensures clear, reliable emergency lighting for offices, schools, hospitals, and more.



Check the Product on our website

Product Specifications	
Voltage	120 VAC/ 277VAC Dual Voltage
Finish	White Finish, Red / Green Sign
Emergency Time	Min 90 Minutes with 9.6V Ni-Cad Battery
Color Temperature	5000 K
Lumens	245 lm
CRI	80+
Watt	4.6 W
Operating Temperature	32°F ~ +104°F / 0°C~ +40°C
Package Info	20.1in x 12.4 in x 17.1 in
PC / Master Pack	6 PCS
Weight	27 LB
Features	Innovative and easy installation in minutes in a Universal J-box mounting pattern. Remote capable application Max 2.4W, Input 3.6V-9.6V



GLOBAL TRADING CO.

Contact Us

1-844-GO ZIPPY

1-844-469-4779

info@zippyglobaltrading.com

360 York Road, Unit 5-6,

Niagara-on-the-Lake,

ON, Canada, L0S 1J0

